

H2203/1

3.2 tonne 2 post electro-hydraulic lift



Features

Single phase version available

- Electro-mechanical locking device
- Automatic arm locking device
- Inter-changeable screw pads
- Anti-toe protection guards
- Overload safety device
- Completely baseless with a clear floor area
- Descent control valve
- Safety valve in case of sudden loss of pressure
- Dead mans controls 24 volt
- Electrical controlled fail safety
- Telescopic arm design
- Large adjustable lifting pads

Technical data

Voltage	230-400v/50Hz - Three phase
Motor rating	2.2kW - 3ph
Operation	Electro-hydraulic
Capacity	3200kg
Weight	750kg
Lift/lower	45 seconds
Lifting height	2065mm
Pad height	95mm
Pad extensions	60mm 100mm 170mm
Concrete	35N/mm ² strength continuous slab 160mm minimum thickness Withstand 2.25 tonne static load Withstand 4.5 tonne shock load

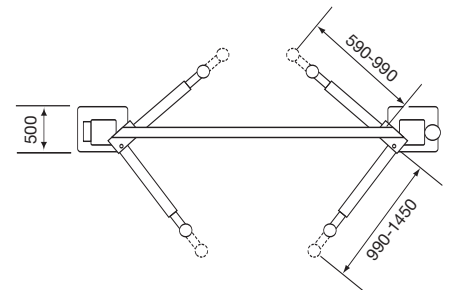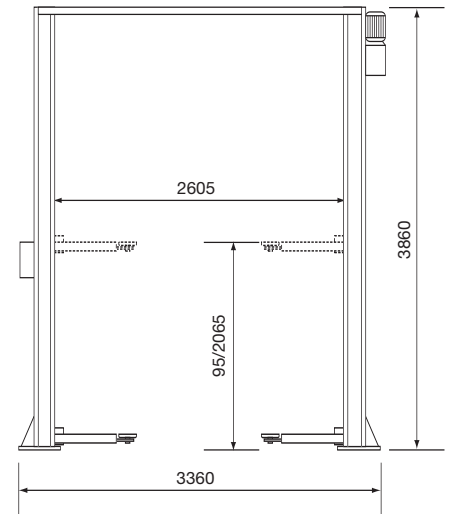

Important Please read supply and installations notes on back page.
Specifications may change without prior notice. Do not scale.

