

# H2433

## 4.0 tonne 2 post symmetric electro-hydraulic with twin ram


### Features

#### High version available - H2433H

- Fully electro-hydraulic giving long life and low cost
- Completely baseless with a clear floor area
- Electromechanical locking device in case of rope failure
- Automatic arm locking
- Anti-toe protection guards
- Single screw pads
- Overload safety-device
- Descent control valve
- Parachute valve
- "Dead man" controls 24V
- Mechanical synchronisation
- Full range of lifting adaptors

### Technical data

Voltage	230-400v/50Hz - Three phase only
Motor rating	2.2kW - 3ph
Operation	Electro-hydraulic
Capacity	4000kg
Weight	850kg
Lift/lower	35 seconds
Lifting height	1935mm
Pad height	100mm
Pad extensions	60mm 100mm 170mm
Concrete	35N/mm <sup>2</sup> strength continuous slab 200 mm minimum thickness Withstand 3.0 tonne static load Withstand 5.0 tonne shock load

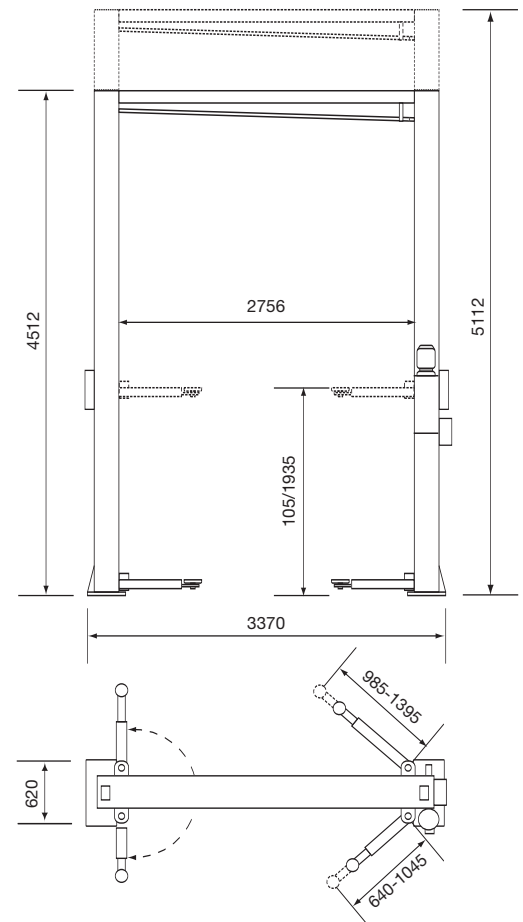

**Important** Please read supply and installations notes on back page. Specifications may change without prior notice. Do not scale.

