



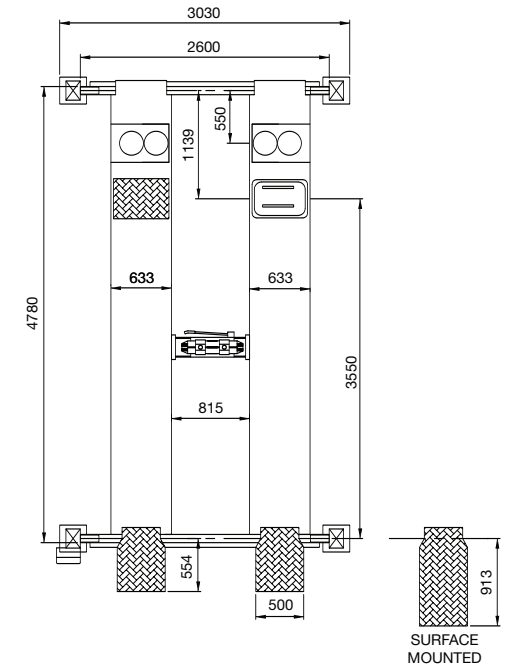

Photograph for reference only - Specifications may change without notice

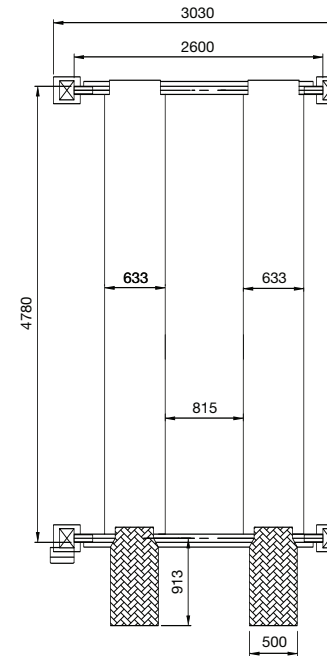

Do not scale line drawings - Specifications may change without notice

H4403 SERVICE

4 tonne four post electro-hydraulic lift

Features

- Low maintenance costs
- Safe and reliable hydraulic operation
- Ideal for general workshop and fast fit
- Platform length 4780mm
- 170mm low profile platform
- Anti tilt system
- Emergency stop valve
- Automatic air-operated parking system
- Eccentric brake system

Accessories

- Lighting Kit (P40LK)
- Extended Ramp Kit for low ground clearance vehicles (P41ER)
- Drive through version

Technical data

Lifting Capacity	4000kg
Height lowered/raised	170/1800mm
Width between columns	3000mm
Overall width	3304mm
Width across platforms	1852/2324mm
Width of each platform	500mm
Overall platform length	4780mm
Overall height	2235mm
Length of approach ramp	913mmSM
	554FF
Lifting on full load (3ph 3kW)	22 sec

3 phase

Voltage	400V, 50Hz, 3 phase and neutral
Cable	Four wire plus earth
Current	Fused at 20A

Motor	3kW direct on-line start
Cable size	2.5mm ²

Single phase

Voltage	230V, 50Hz, 1 phase
Cable	Two wire plus earth
Current	Fused at 30A
Motor	1.1kW direct on-line start
Cable size	2.5mm ²

Concrete

35N/mm² strength single continuous
 130mm minimum thickness
 Withstand 3.0 tonne static load
 Withstand 2.5 tonne shock load
 Level over base must not exceed 1 in 400 in any direction

H4403ATL

4 tonne four post ATL electro-hydraulic lift

Features

- Low maintenance costs
- Safe and reliable hydraulic operation
- Complete with recessed radius plates and air operated shaker plates
- Platform length 4780mm
- 195mm low profile platform
- Anti tilt system
- Emergency stop valve
- Automatic air-operated parking system
- Eccentric brake system

Accessories

- Lighting Kit (P40LK)
- Extended Ramp Kit for low ground clearance vehicles (P41ER)
- Drive through version

Technical data

Lifting Capacity	4000kg
Height lowered/raised	195/1800mm
Width between columns	2600mm
Overall width	3030mm
Width across platforms	2081mm
Width of each platform	633mm
Overall platform length	4780mm
Overall height	2235mm
Length of approach ramp	913mmSM
	554FF
Lifting time on full load (3ph 3kW)	22 sec

3 phase

Voltage	400V, 50Hz, 3 phase and neutral
Cable	Four wire plus earth
Current	Fused at 20A

Motor	3kW direct on-line start
Cable size	2.5mm ²

Single phase

Voltage	230V, 50Hz, 1 phase
Cable	Two wire plus earth
Current	Fused at 30A
Motor	1.1kW direct on-line start
Cable size	2.5mm ²

Concrete

35N/mm² strength single continuous
 130mm minimum thickness
 Withstand 3.0 tonne static load
 Withstand 2.5 tonne shock load
 Level over base must not exceed 1 in 400 in any direction